



STAZ-KS

Fork Lift Grab STAZ-KS


Specially designed for operation in silicate block factories. With crane boom, hydraulic continuous rotator, hydraulic swing damper and rubber grippers for handling silicate blocks gently.

- ▷ working load limit up to 6,000 kg!

Different models to cope with specific needs available on request.

Polyamide sliding guides come with a 5 year guarantee.

All Forklift Grabs can also be used as cubing grabs in fully automatic cubers for blocks and pavers.

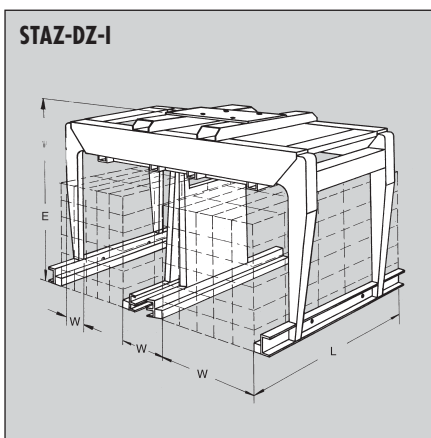

STAZ-DZ-I

Double Fork Lift Grab STAZ-DZ I

▷ The same characteristics as the STAZ but, due to an additional hydraulically spreadable centre divider it can be used to lift 2 stacks at the same time if they are standing across on the conveyor belt. The extremely slim build of the central divider (200 mm closed, 300 mm spread) means a lot of space can be saved when stacking goods.

▷ Only one hydraulic circuit is needed to be supplied by the fork lift truck to operate both, clamping and center divider due to a hydraulic sequence circuit. (Supplied without connecting hoses to the fork lift-truck).

Polyamide sliding guides come with a 5 year guarantee.

Type	Opening Width W mm (in)	Height E mm (in)	Working Load Limit WLL kg (lbs)	Dead Weight kg (lbs)	Order-Number
STAZ-DZ-S-850	550 – 940 (21 ³ / ₄ – 37")	850 (33 ¹ / ₂ ")	3,200 (7,100)	570 (1,260)	5700.0050
STAZ-DZ-S-1000	550 – 940 (21 ³ / ₄ – 37")	1,000 (39")	3,200 (7,100)	620 (1,370)	5700.0052

Larger or modified opening widths and heights are available on request.

Recommended Accessories: (Description see pages 11.7 – 11.12)



STAZ-P

Fork Lift Grab STAZ-P/STAZ-KA

▷ Specially designed for the heavy duty work with forklift truck, directly fixed to the carriage plate of the forklift.

▷ Type STAZ-P grips the pack by pressing it towards the gripper close to the forklift. This achieves smallest possible load center of the pack.

▷ Type STAZ-KA moves both grippers synchronized towards the pack. Compact design due to integrated crane boom.

▷ Light-weight, yet with a high working load limit due to the use of high-tensile steel for load bearing parts.

▷ Fully hydraulic parallel opening range.
▷ Low maintenance steel polyamide sliding guides.

Standard specifications:

- ▷ Manually adjustable pressure relieve valve.
- ▷ Oil Pressure Gauge
- ▷ Can fit all the usual packs of building materials due to a large opening range and to the exchangeable grippers which come in various lengths and designs.
- ▷ We recommend the use of a side-shift built into the forklift.

Polyamide sliding guides come with a 5 year guarantee!

Type	Opening Width Main Gripper W1 mm (in)	Height E mm (in)	Working Load Limit WLL kg (lbs)	Dead Weight kg (lbs)	Order-Number
STAZ-SS/S-1000-UNIGRIP-I-P	580 – 1,260 (22 ³ / ₄ – 50")	1,000 (39")	2,300 (5,100)	440 (970)	5700.0087
STAZ-S-1000-UNIGRIP-II-KA	370 – 1,370 (14 ¹ / ₂ – 54")	1,000 (39")	2,000 (4,400)	590 (1,300)	5700.0107

Larger or modified opening widths and heights are available on request.



STAZ-KA

021218 Technical data contained in this catalogue can be modified without prior notice in the interest of progress. Illustrations are exemplary and non-binding. No liability accepted for any misprints, mistakes and errors.