



## VACUUM-AIRSPED VAS-H

► This innovative tool is driven by compressed air and saves a lot of time.

No painful and labor-intensive shifting of the pavers when one paver should be picked out of the middle of production unit.

Specially designed for the quick and simple handling of pavers during quality control.

By using this tool, pavers can be picked up immediately after production or before cubing.

► Hand operated valve to switch off the compressed air flow in order to save energy.


► Seal exchangeable within seconds.

► Suction plates exchangeable by quick coupling.

► Low dead weight.

### Set consisting of:

- 1 Operating unit
- 1 Suction plate SPS-VAS-18
- 1 Suction plate SPS-VAS-9

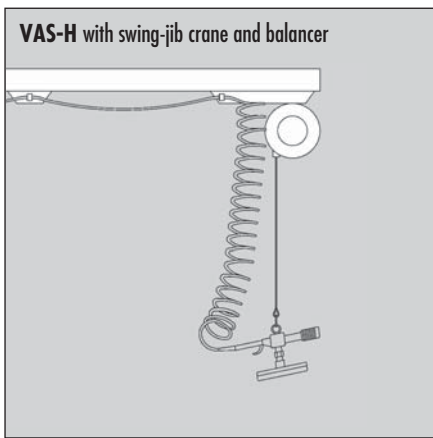

Type	Suction Plate	Suction Plate Dimension mm (in)	max. Suction Volume NL/min	air consumption NL/min	Working Load Limit WLL kg (lbs)	Dead Weight (incl. 1 Suction Plate) kg (lbs)	Order-Number
VAS-H-Set ①	SPS-VAS-18	110 x 180 (4 1/4" - 7")	370	392	18* (40)*	2 (4)	5740.0035
	SPS-VAS-9	103 x 153 (4" - 6")			9* (20)*	2 (4)	

\* Value at 400 mbar low pressure

## Accessories

Type	Description	Order-Number
Replacement seal Easy to attach without glueing!	for SPS-VAS-18	4250.0142
	for SPS-VAS-9	4250.0037
Spring-load balancer	load working load limit 3 - 5 kg (7 - 10 lbs)	4200.0059

① Durable surface protection by galvanizing