



Kerb Stone Clamp VZ-M-UNI

Fully mechanical operation for use with any wheel loader, excavator or other carriers.

Standard Specifications:

- ▷ Lifting eye for attaching to crane hook.
- ▷ Handles for optimal guidance of the clamp.
- ▷ Automatic release for the fully automatic switch over from "full" to "empty".

Type	Gripping Range* W mm (in)	Working Load Limit WLL kg (lbs)	Dead Weight kg (lbs)	Order-Number
VZ-M-UNI ①	900 – 1,065 (35½ – 42¼")	300 (660)	21 (45)	5310.0275

See page 6.14 for the Hydraulic Kerb Stone Clamp VZ-H-UNI



Kerb Stone Handles BZ

For the handling of kerb stones, edging stones, gutters and similar. Also for natural kerb stones. The plumb line remains completely free through a short intervening.

We recommend, using the kerb stone handles in pairs.

- ▷ Galvanised finish
- ▷ Exchangeable rubber grippers

Type	Gripping Range* W mm (in)	Inside Height E mm (in)	Gripper Length L mm (in)	Working Load Limit WLL kg (lbs)	Dead Weight kg (lbs)	Order-Number
BZ ①	0 – 400 (0 – 15¾")	200 (7¾")	150 (6")	150 (330)	4 (9)	5320.0084
Spare Rubbers BZ per piece, loose						4320.0006
Spare Rubbers BZ 2 pieces in plastic bag						4320.0115



Universal Handle BVZ

A large adjustable opening range means the BVZ can be universally used for all gardening- and landscaping-design products.


▷ Exchangeable rubber metal bars as gripping elements.

- ▷ Galvanised finish
- ▷ Pin bolts to adjust the opening width.

Standard Specifications:

- ▷ Removable handles

Type	Gripping Range* W mm (in)	Inside Height E mm (in)	Gripper Length L mm (in)	Working Load Limit WLL kg (lbs)	Dead Weight kg (lbs)	Order-Number
BVZ ①	0 – 550 (0 – 21¾")	210 (8¼")	200 (7¾")	200 (440)	12 (26)	5320.0020

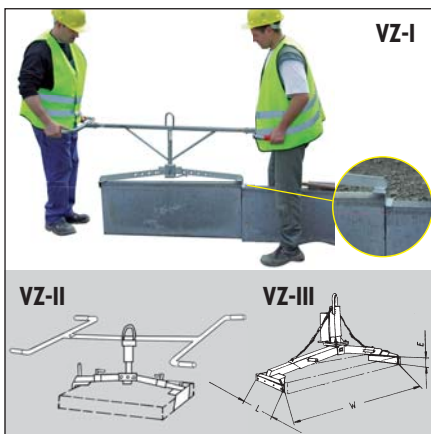

Laying Clamp VZ

Especially suitable for handling concrete kerb stones. The one-sided angular supports which are placed on the kerb stone already in place enable an extremely narrow joint. ▷ Grips longitudinally so that it can be used in tightest spaces.

- ▷ No deflection of the plumb line.
- ▷ All models are equipped with a lifting eye.
- ▷ The VZ-I + II + III has a galvanised finish.
- ▷ The VZ-II and VZ-III come complete with rubber grippers, suitable for moving large slabs. The VZ-III is also equipped with automatic release.

Type	Gripping Range* W mm (in)	Inside Height E mm (in)	Gripper Length L mm (in)	Working Load Limit WLL kg (lbs)	Dead Weight kg (lbs)	Order-Number
VZ-I ①	500 – 1,045 (19¾" – 41¼")	40 (1½")	100 (4")	100 (220)	12 (26)	5310.0140
VZ-II ①	700 – 1,000 (27½" – 39")	50 (2")	200 (7¾")	300 (660)	25 (55)	5310.0141
VZ-III ①	1,000 – 1,700 (39" – 67")	60 (2½")	420 (16½")	1,000 (2,200)	60 (132)	5310.0142
HVA-VZ-II: Adjustable Height Stop for VZ II, on one side only						4310.0846

*Gripping range indicates the minimum and maximum pack measurements of building materials, which can be picked-up with this grab.

① Durable surface protection by galvanizing

02128 Technical data contained in this catalogue can be modified without prior notice in the interest of progress. Illustrations are exemplary and non-binding. No liability accepted for any misprints, mistakes and errors.