



Concrete Step Handles TSV

Universal handles due to a large adjustable opening range. Suitable for steps, kerbs, L-stones, etc.


Standard Specifications:

- ▷ Lifting eye for attaching to crane hook.
- ▷ Semi-automatic – for manual switch over

from "full" to "empty".

- ▷ Carrying handle
- ▷ Carrying handle turnable by 90° according to the working space.
- ▷ Exchangeable rubber grippers
- ▷ Galvanised finish

Type	Gripping Range* W mm (in)	Inside Height E mm (in)	Gripper Length L mm (in)	Working Load Limit WLL kg (lbs)	Dead Weight kg (lbs)	Order-Number
TSV [Ⓢ]	70 – 500 (2¾ – 19¾")	125 (5")	200 (7¾")	250 (550)	18 (39)	5310.0130

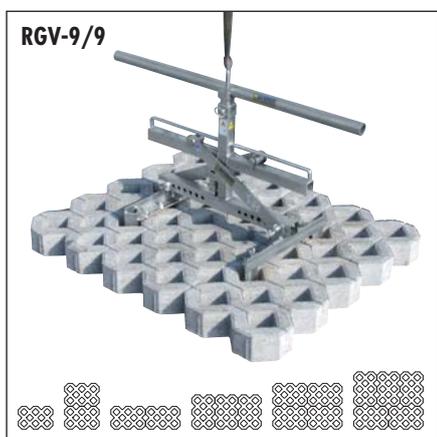

Turf Stone Laying Clamp RGV

Laying Clamp for Turf Stones, versatile due to exchangeable adaptors.

- ▷ RGV-9/9 fits Turf Stones 60 x 40 cm, hole dim. 9 x 9 cm.
- ▷ Installs 1 to 5 units at once.

Standard specifications:

- ▷ Automatic release for fully automatic switch-over from "full" to "empty".
- ▷ Lifting eye, handle, turnable by 90°.
- ▷ Screwable adaptors – not compatible with TSV!

Type	Description	Gripping Range W mm (in) depending on adaptors	Working Load Limit WLL kg (lbs)	Dead Weight kg (lbs)	Order-Number
RGV [Ⓢ]	Basic unit, without adaptors	approx. 70 – 500 (2¾ – 20")	250 (550)	15 (30)	4310.1154
RGV-AS-9/9 [Ⓢ]	Adaptors for 9 x 9 cm		250 (550)	5 (11)	4310.1153
RGV-9/9 [Ⓢ]	Complete unit, RGV+RGV-AS-9/9	300/500 (12 – 20")	250 (550)	20 (44)	5310.0372

For an enquiry concerning the required adapter set, please send us a dimensioned drawing of the block used.

02/218 Technical data contained in this catalogue can be modified without prior notice in the interest of progress. Illustrations are exemplary and non-binding. No liability accepted for any misprints, mistakes and errors.

*Gripping range indicates the minimum and maximum pack measurements of building materials, which can be picked-up with this grab.

Ⓢ Durable surface protection by galvanizing