



## Column Handles PVZ

Especially suitable for the carrying and laying of round and rectangular concrete or wooden columns. Diameter: 180 – 200 mm.

- ▶ Clamping is independent of the length.

▶ Constructed in such a way that the columns can be set close enough to touch one another.

▶ The PVZ-V is an adjustable model.

▶ Galvanised finish

Type	Gripping Range* W mm (in)	Gripper Length L mm (in)	Working Load Limit WLL kg (lbs)	Dead Weight kg (lbs)	Order-Number
PVZ ①	200 (7¾")	80 (3¼")	150 (330)	6 (13)	5320.0030
PVZ-V ①	100 – 305 (4 – 12")	80 (3¼")	150 (330)	8 (18)	5320.0031



## Column Grab MPVZ-V

For use with a carrier and especially suitable for lifting concrete and wooden columns from a horizontal to a vertical position for installation. Clamping is independent of the length.

The MPVZ-V is for the use of rectangular columns and round palisades. Adjustable gripping width.

### Standard Specifications:

- ▶ Swivelling grippers
- ▶ Highly durable, exchangeable rubber pads.

Type	Gripping Range* W mm (in)	Working Load Limit WLL kg (lbs)	Dead Weight kg (lbs)	Order-Number
MPVZ-V ①	120 – 200 (4¾ – 7¾")	300 (660)	30 (66)	5310.0233



## Stone Pillar Grab SLS-8/20-G-VA

Stone pillars and palisades, mainly made of attractive natural stone such as granite, become increasingly popular in horticulture and landscaping. For efficient installation the handy stone pillar grab SLS-8/20-G-VA was designed. Suspended to a lifting device, such as a mini excavator, the horizontal pillar is clamped through a crank handle. The gripping force automatically increases while lifting and the pil-

lar can be raised safely and installed easily.

After installation the crank is to be released.

▶ **NEW:** The lifting eye can be adjusted to the center of gravity of the product being lifted to let it hang vertically.

▶ Double-sided, non-marking rubber grippers, thus no claw marks or scratches on pillars and palisades.

Type	Gripping Range* W mm (in)	Working Load Limit WLL kg (lbs)	Dead Weight kg (lbs)	Order-Number
SLS-8/20-G-VA ①	80 – 200 (3 – 7¾")	300 (660)	11 (25)	5310.0409
GB-SLS ①				4310.1415

## Hollow Slope Block Handles FSZ


Especially suitable for the handling of hollow slope blocks and similar elements which can be lifted by hand.

- ▶ Grips from the inside
- ▶ Removable double handles
- ▶ Galvanised finish FSZ/FSZ-M

▶ Large adjustable gripping range to match all current hollow slope blocks.

### FSZ-M for Lifting Devices

with lifting eye, handle, automatic release for fully automatic switch-over from "full" to "empty".

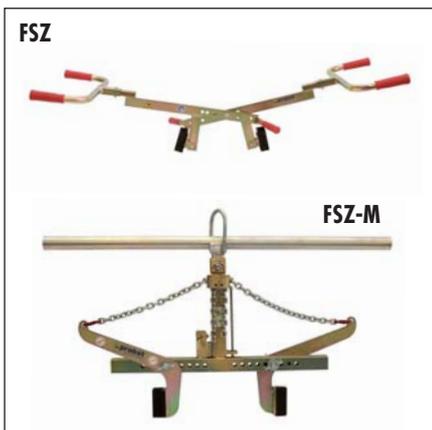

Type	Gripping Range* W mm (in)	Working Load Limit WLL kg (lbs)	Dead Weight kg (lbs)	Order-Number
FSZ ①	180 – 580 (7 – 22¾")	150 (330)	8 (17)	5320.0001
FSZ-M ①	180 – 580 (7 – 22¾")	250 (550)	16 (35)	5320.0002

\*Gripping range indicates the minimum and maximum pack measurements of building materials, which can be picked-up with this grab.

① Durable surface protection by galvanizing

021218 Technical data contained in this catalogue can be modified without prior notice in the interest of progress. Illustrations are exemplary and non-binding. No liability accepted for any misprints, mistakes and errors.