


SHS

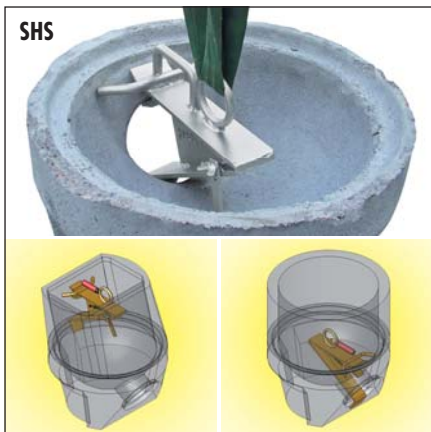

Laying Hook for Gullies SHS

It's as simple as that - for effortless installation of bulky and heavy bottom parts and cones for gullies: no need to purchase costly special clamps, just use the ingenious laying hook SHS. Well-priced and compact - safe and fast handling with any lifting device for simple installation with millimeter precision.

- Suitable for bottom parts with drain and for cones as per DIN 4052-3.
- Lightweight shaft element can be piled on top of the bottom part already on the pallet, thus both parts are installed together in one run.
- A tool so handy to fit into each road builders' toolbox.

Type		Working Load Limit WLL kg (lbs)	Dead Weight kg (lbs)	Order-Number
SHS ^①	Suitable for bottom parts with drain and for cones as per DIN 4052-3	100 (220)	4 (9)	5400.0024

SAZ-UNI



Gully Clamp SAZ-UNI

German Patent

The small and light clamp for cumbersome and heavy concrete sections for road gullies.

- For base and intermediate sections in accordance with DIN 4052 with diameter Ø 550 mm.
- By undoing the spring bolt and turning the swivel arm, sleeve sections of external size 625 mm can also be gripped and laid.

- One-man operation due to adjustable lock position in hanging eye for releasing the product.
- With oval ring, can be used as a supporting surface and handle.
- Because of the limited dead weight of only 4 kg, the clamp can also be used on small carrying devices.

Type ^①	Gripping Range W mm (in)	Working Load Limit WLL kg (lbs)	Dead Weight kg (lbs)	Order-Number
SAZ-UNI ^①	550/625 (21½" / 24½")	165 (365)	4 (9)	5400.0035

SRZ-M



Manhole Frame Clamp SRZ-M

Lightweight, efficient and profitable – Ideal for repair and maintenance of manhole frames and compensation rings.

- Grips from the inside, with removable handles.

- Automatic release for fully-automatically switch over from „full“ to „empty“.
- With lifting eye for attaching to crane hook.

Type	Opening Width W mm (in)	Working Load Limit WLL kg (lbs)	Dead Weight kg (lbs)	Order-Number
SRZ-M ^①	200 – 620 (7¾ – 24½")	150 (330)	ca. 20 (44)	5400.0033

Manhole Frame Clamp SRZ-KOMBI

A clamp for frame and cover! Easy and safe transport and installation of manhole covers in accordance with EN 124/DIN 1229.


- Both the frame and the cover can be lifted and installed safely.
- The lifting eye on the shaft frame clamp is attached to the load hook on the digger/loader and placed on the manhole cover. After releasing the safety catch, the frame is lifted with the cover and placed on the shaft cone.

- When the manhole cover is put down, the safety catch clicks into place by itself and the clamp opens automatically.
- By turning through 180°, the covers can also be effortlessly lifted out of the frame with the shaft frame clamp and the 2 A hooks and 2 B hooks included as standard.

Type	Housing Diameter Ø mm (in)	Working Load Limit WLL kg (lbs)	Dead Weight kg (lbs)	Order-Number
SRZ-KOMBI ^①	750/785 (30/31")	200 (440)	15 (35)	5310.0373

① Durable surface protection by galvanizing

SRZ-KOMBI

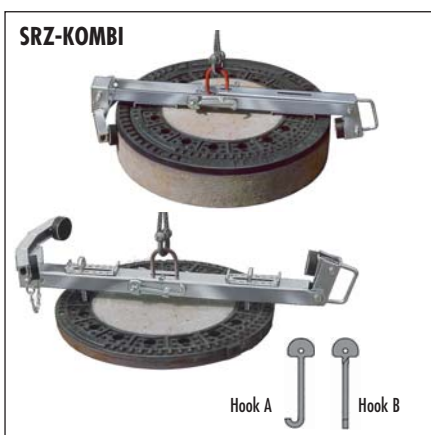

Hook A

Hook B