

R220C5

Engine ref.	6068CP550
Alternator ref.	KH01220T
Canopy	M5226
Performance class	G3

GENERAL CHARACTERISTICS

Frequency (Hz)	50 Hz
Voltage (V)	400/230
Standard Control Panel	APM403

Voltage	ESP		PRP		Standby Amps
	kWe	kVA	kWe	kVA	
400/230	176	220	160	200	318

DESCRIPTIVE

- Stage V engine
- Adjustable earth fault protection and earthing rod
- Four-pole circuit breaker
- Connection terminal box rental type
- Containment fuel tank and large autonomy
- Forks and frame protection pads
- Access door to the radiator
- Inlet air preheating
- Battery isolating switch
- Oil drainage pump
- Heavy duty air filter with interchangeable cartridge
- Primary fuel filter
- Heat hand protections (EC standards)
- Electronic governor with speed adjustment

DIMENSIONS

Length (mm)	3884
Width (mm)	1191
Height (mm)	2368
Dry weight (kg)	3640
Tank capacity (L)	735

SOUND LEVELS

Acoustic pressure level @1m in dB(A) 50Hz (75% PRP) (Associated uncertainty)	78 (0.70)
Acoustic pressure level @7m in dB(A) 50Hz (75% PRP) (Associated uncertainty)	68
Sound power level guaranteed (Lwa) 50Hz (75% PRP) (Associated uncertainty)	97

POWER DEFINITION

PRP : Prime Power is available for an unlimited number of annual operating hours in variable load applications, in accordance with ISO 8528-1. ESP : The standby power rating is applicable for supplying emergency power in variable load applications in accordance with ISO 8528-1. Overload is not allowed.

TERMS OF USE

According to the standard, the nominal power assigned by the genset is given for 25°C Air Inlet Temperature, of a barometric pressure of 100 kPA (100 m A.S.L), and 30 % relative humidity. For particular conditions in your installation, refer to the derating table.

ASSOCIATED UNCERTAINTY

For the generating sets used indoor, where the acoustic pressure levels depends on the installation conditions, it is not possible to specify the ambient noise level in the exploitation and maintenance instructions . You will also find in our exploitation and maintenance instructions a warning concerning the air noise dangers and the need to implement appropriated preventive measures.



R220C5

ENGINE CHARACTERISTICS

GENERAL ENGINE DATAS

Engine brand	JOHN DEERE
Engine ref.	6068CP550
Air inlet system	Turbo
Cylinders configuration	L
Number of cylinders	6
Displacement (l)	6.72
Charge Air coolant	Air/Air
Bore (mm) x Stroke (mm)	106 x 127
Compression ratio	16.7 : 1
Speed (RPM)	1500
Pistons speed (m/s)	6.35
Maximum stand-by power at rated RPM (kW)	202
BMEP @ PRP 50 Hz (bar)	21.90
Governor type	Electronic

COOLING SYSTEM

Radiator & Engine capacity (l)	34.20
Fan power 50Hz (kW)	12.10
Type of coolant	Glycol-Ethylene

EXHAUST

Exhaust gas temperature @ ESP 50Hz (°C)	464
Exhaust gas flow @ ESP 50Hz (l/s)	416.70
Max. exhaust back pressure (mm H2O)	571

FUEL

Consumption @ 100% load ESP (l/h)	48.20
Consumption @ 100% PRP load (l/h)	43.40
Consumption @ 75% PRP load (l/h)	32.20
Consumption @ 50% PRP load (l/h)	22.20
Maximum fuel pump flow (l/h)	145.90

OIL

Oil system capacity including filters (l)	32
Min. oil pressure (bar)	2

DIESEL EXHAUST FLUID

DEF Tank Capacity (L)	113
-----------------------	-----

HEAT BALANCE


Heat rejection to exhaust (kW)	112
Heat rejection to coolant HT (kW)	112

AIR INTAKE

Max. intake restriction (mm H2O)	625
Intake air flow (l/s)	183.30

Alternator ref.	KH01220T	Continuous Nominal Rating 40°C (kVA)	200
Number of Phase	Three phase	Standby Rating 27°C (kVA)	220
Power factor (Cos Phi)	0.80	Efficiencies 100% of load (%)	92.50
Altitude (m)	0 à 1000	Air flow (m3/s)	0.48
Overspeed (rpm)	2250	Short circuit ratio (Kcc)	0.4010
Number of pole	4	Direct axis synchro reactance unsaturated (Xd) (%)	339
Capacity for maintaining short circuit at 3 In for 10 s	Yes	Quadra axis synchro reactance unsaturated (Xq) (%)	173
Insulation class	H	Open circuit time constant (T'do) (ms)	2351
T° class (H/125°), continuous 40°C	H / 125°K	Direct axis transient reactance saturated (X'd) (%)	14.40
T° class (H/163°C), standby 27°C	H / 163°K	Short circuit transient time constant (T'd) (ms)	100
AVR Regulation	Yes	Direct axis subtransient reactance saturated (X''d) (%)	11.50
Total Harmonic Distortion in no-load DHT (%)	<2.5	Subtransient time constant (T''d) (ms)	10
Total Harmonic Distortion, on linear load DHT (%)	<2.5	Quadra axis subtransient reactance saturated (X''q) (%)	15.10
Wave form : NEMA=TIF	<50	Subtransient time constant (T''q) (ms)	10
Wave form : CEI=FHT	<2	Zero sequence reactance unsaturated (Xo) (%)	0.60
Number of bearing	Single Bearing	Negative sequence reactance saturated (X2) (%)	13.35
Coupling	Direct	Armature time constant (Ta) (ms)	15
Voltage regulation at established rating (+/- %)	0.50	No load excitation current (io) (A)	0.79
Recovery time (Delta U = 20% transient) (ms)	500	Full load excitation current (ic) (A)	3.03
Indication of protection	IP 23	Full load excitation voltage (uc) (V)	41.30
Technology	Brushless	Engine start (Delta U = 20% perm. or 30% trans.) (kVA)	595.45
		Transient dip (4/4 load) - PF : 0,8 AR (%)	11
		No load losses (W)	3402.42
		Heat rejection (W)	12899.7
			3
		Unbalanced load acceptance ratio (%)	100

APM403, basic generating set and power plant control

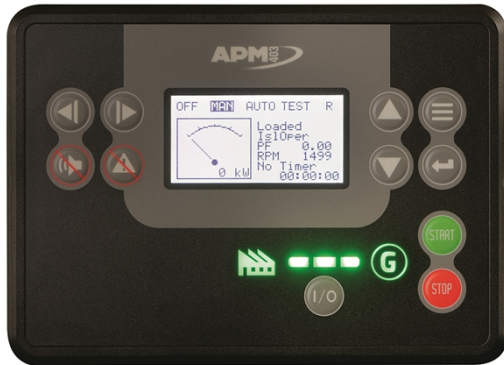

The APM403 is a versatile control unit which allows operation in manual or automatic mode
 Measurements : voltage and current
 kW/kWh/kVA power meters
 Standard specifications: Voltmeter, Frequency meter.
 Optional : Battery ammeter.
 J1939 CAN ECU engine control
 Alarms and faults: Oil pressure, Coolant temperature, Overspeed, Start-up failure, alternator min/max, Emergency stop button.
 Engine parameters: Fuel level, hour counter, battery voltage.
 Optional (standard at 24V): Oil pressure, water temperature.
 Event log/ Management of the last 300 genset events.
 Mains and genset protection
 Clock management
 USB connections, USB Host and PC,
 Communications : RS485 INTERFACE
 ModBUS protocol /SNMP
 Optional : Ethernet, GPRS, remote control, 3G, 4G,
 Websupervisor, SMS, E-mails